



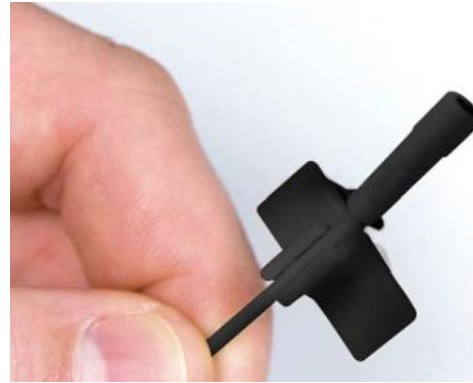

### LM-212

The LM-212 high quality lavalier microphone has been designed with the professional in mind. Its sub miniature construction, together with its durable microphone clip makes it an ideal partner for all area of live work.

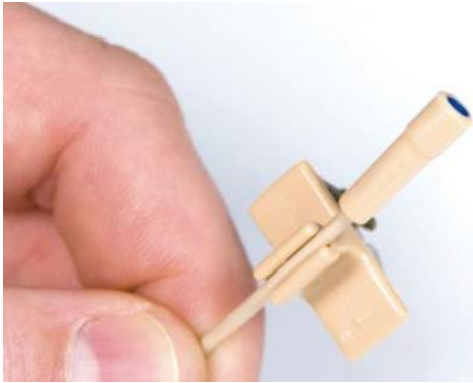

The LM-212 can be used either as a microphone for instrument pick-up or for delivering highly intelligible speech or vocals. The extremely low profile of the LM-212 enables this microphone to be used in places where others have failed due to their more obtrusive size.

With an exceptionally low physical profile, it can withstand the penetration of moisture and make-up, and has the same membrane construction as its sister product the HM-22. Whether used in the hair, on the face or as a body-worn lavalier, this microphone will withstand the everyday rigours of production.

Type: Omni-directional electret condenser  
Nominal Impedance: 4400 ohms  
Max SPL: >120dB (high SPL version available)  
Operating Voltage: 2-10 volts min/max  
Current Consumption: 12-25uA min/max  
Frequency response: 40Hz -18 kHz,  $\pm 3$ dB  
Cable Length: 1200mm  
Colours Available: Black & Beige

SJ prefix = 3.5mm Screw Jack  
X prefix = 4 Pin Mini XLR (TA4F)  
TS prefix = 4 pole Lemo (OB 4 pin male)  
R suffix = (red dot) indicates that the microphone incorporates a -12dB pad avoiding preamplifier overload when used with very high sound levels.

91-6326 TRANTEC SJ212-B-R MICROPHONE Lapel, 40Hz-18kHz, for radiomic, 12dB pad, screw jack, black  
91-6327 TRANTEC SJ212-P-R MICROPHONE Lapel, 40Hz-18kHz, for radiomic, 12dB pad, screw jack, pink  
91-6336 TRANTEC TS212-B-R MICROPHONE Lapel, 40Hz-18kHz, for radiomic, 12dB pad, Lemo, black  
91-6337 TRANTEC TS212-P-R MICROPHONE Lapel, 40Hz-18kHz, for radiomic, 12dB pad, Lemo, pink  
91-6366 TRANTEC X212-B-R MICROPHONE Lapel, 40Hz-18kHz, for radiomic, 12dB pad, mini XLR4, black  
91-6367 TRANTEC X212-P-R MICROPHONE Lapel, 40Hz-18kHz, for radiomic, 12dB pad, mini XLR4, pink