

## S4.04-L-EA

### PRESENTATION SET



The TOA's TRANTEC S4.04 series Wireless Microphone system is designed for use on the UHF frequency band, and suitable for vocal or speech reinforcement applications. It features a compander circuit which minimizes the influence of ambient noise. S4.04-L includes a wireless beltpack transmitter with a lavalier microphone and a diversity receiver.

### Key features

- Up to 4 simultaneous channels
- Fully synthesized PLL quartz tuning technology
- IR Sync - Infra-red auto channel setup
- Approx. 100m operating range (line of sight)

## Specifications






System Components	Lavalier wireless microphone x1, Tuner x 1
Frequency Range	506-937.5 MHz*, UHF
Channel Selectable	4 channels
Tunable Frequency	25 kHz Steps
Pilot tone	32.768kHz
Total Harmonic Distortion	less than 1% @1kHz
Function	IR sync, Channel scan, Battery life information
Included Accessories	AC Adapter** x 1, Screwdriver x 1

\*C band : 785 - 832 MHz, UHF

\*G(UK) version: 220 - 230 V AC, 50 Hz


## Dimensions

### Wireless Transmitter

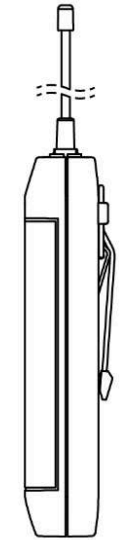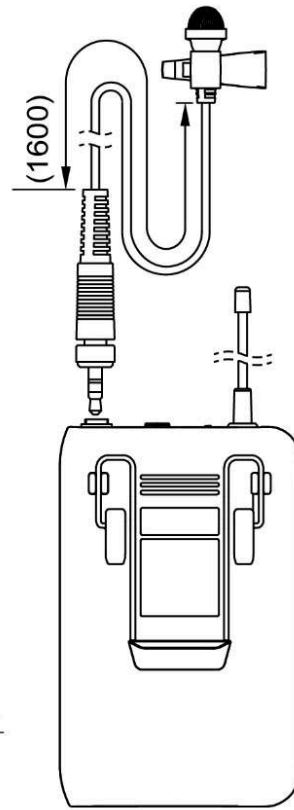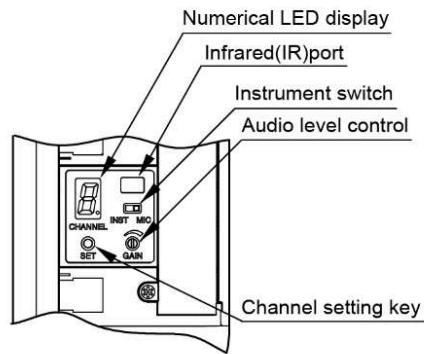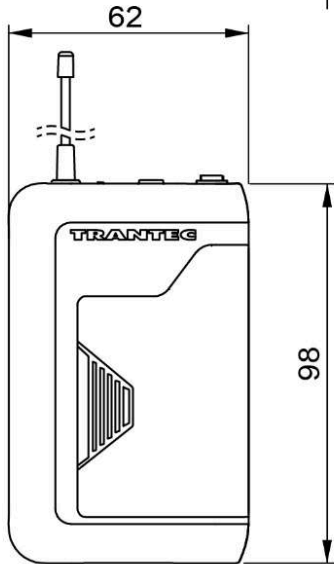
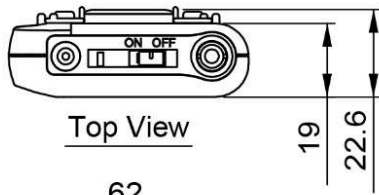


### Wireless Tuner

Rear View

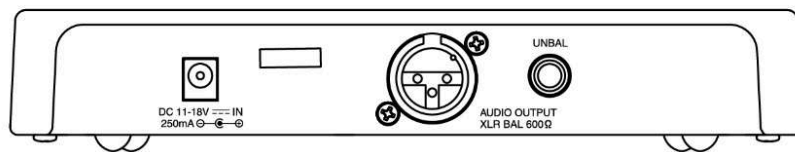

Top View

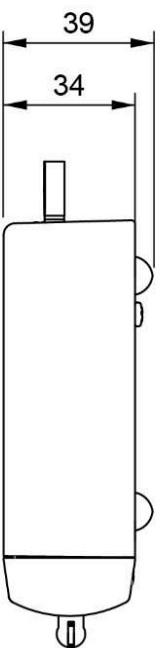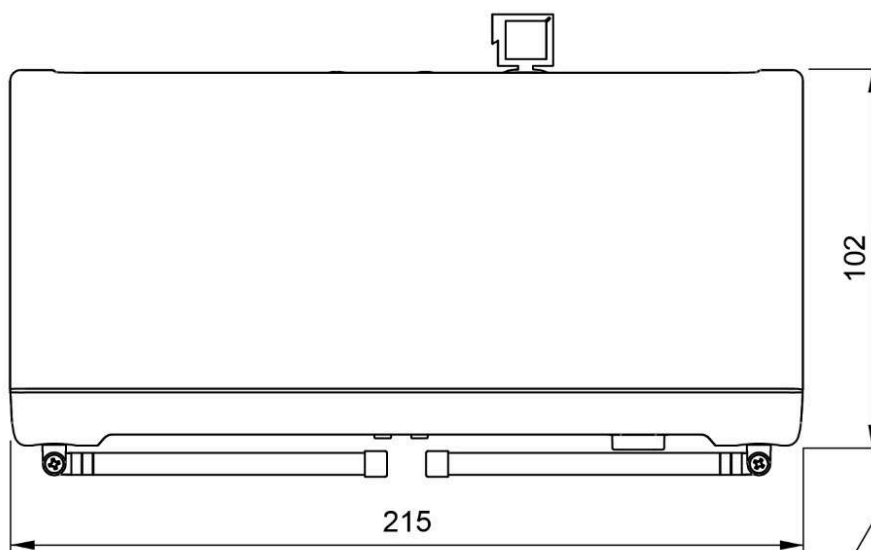

SideView

Front View

