



QPS 10K

FOUR CHANNELS PROFESSIONAL POWER AMPLIFIER



Description

QPS Series is a range of four channel professional amplifiers that combines high-quality performance and reliability with the latest power amplification technologies. This high-value design offers, in compact 2-rack unit space, the sound quality and the durability of class HD amplifiers with the innovation of the latest power devices available. QPS 10K is a 4-channel power amplifier that delivers up to 4 x 2,500 W @ 2 Ohms. It features independent gain control, signal/clip and faults indicators, channels A and C XLR output link, parallel/bridge modes, and speakON output connectors. Moreover, it is protected against shorts and open circuits. Thanks to its high-efficiency heat sinks and variable speed fans, QPS 10K can withstand the most extreme heat conditions ensuring reliability.

Features

- › 4 x 2,500 W class HD power amplifier
- › Fast response and low distortion
- › Stereo, parallel and bridge modes
- › Comprehensive protection circuits
- › Variable speed cooling
- › Signal, clip, fault led indicators
- › XLR inputs and speakON outputs
- › Limiter on each channel
- › 20 ÷ 20000 Hz frequency range

Part Number





12100057	QPS 10K	220-240 V	Black - RAL 9005	EAN 8024530019839
12100058	QPS 10K	100-120 V	Black - RAL 9005	EAN 8024530019846



QPS 10K

FOUR CHANNELS PROFESSIONAL POWER AMPLIFIER

Line Art 2D

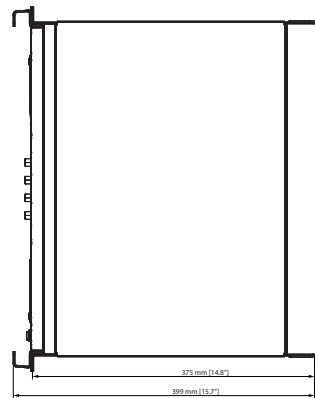

TECHNICAL SPECIFICATIONS

Amplifier specifications

Amplifier Class	HD
Output Power	4 x 2500 W @ 2 ohm 4 x 2200 W @ 4 ohm 4 x 1400 W @ 8 ohm 2 x 5000 W @ 4 ohm (bridge) 2 x 4400 W @ 8 ohm (bridge)
Frequency Response (-3dB)	20 Hz - 20000 Hz
SNR Analog inputs ("A" weighted)	>110 dB
Crosstalk	<70 dB
Distortion (THD+N) @ 1 kHz nominal power	<0.05 %

Input section

Total number of inputs	4
Balanced	4
Mono	4
Line inputs	4
Line connectors	XLR

Output section

Signal output number	2
Signal output connectors	XLR
Power output connectors	Speakon



QPS 10K

FOUR CHANNELS PROFESSIONAL POWER AMPLIFIER

Protections	Cooling	Forced
	Short circuit	Yes
	Thermal	Yes
	DC	Yes
	Fuses	Yes
	VHF (Very High Frequencies)	Yes
Power requirement	Operating voltage	220-240/115 V~ 50/60Hz
	Power consumption	1900 W
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Metal
	Handles	Metal handles included in the front panel
	Color	Black - RAL 9005
	Rack mounting	19", 2U
	Size / Weight	Height
Width		483 mm / 19.02 inches
Depth		399 mm / 15.71 inches
Weight		14.2 kg / 31.31 lbs