




# MX 3250/2

## AMPLIFIED MASTER UNIT

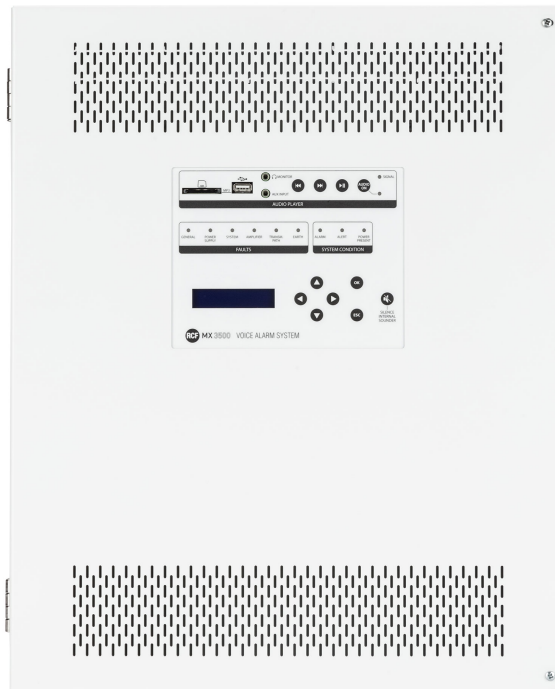

### Description

MX 3250 is the master unit of the Voice Alarm system DXT 3000, dedicated to small and medium size applications where an EN 54-16 certified system is required. It is equipped with powerful and exceptionally reliable Class D power amplifiers, able to provide up to 250 W of total power. Depending on the model, it is able to serve up to 6 independent zones. Moreover, the spare power amplifier facility is also available. The internal power supply is certified EN 54-4, and the back-up batteries can be host inside the cabinet, making the system a complete and extremely compact solution. Moreover, the on-board DSP platform allows optimizing environmental equalization, maximizing voice intelligibility and background music performance. The system can be completed with emergency microphone consoles BM 3804, BM 3804FM and ME 3801, and the buttons extensions BE 3806, allowing to add live announcements functionality.

### Features

- › 250 W total power
- › 2 zones controlled
- › DSP platform on-board
- › Certified EN 54-16 and EN 54-4
- › Emergency messages on monitored SD card
- › Spare power amplifier facility
- › Integrated audio source on front panel
- › Wall mount or rack mount installation

### Part Number

17170177 MX 3250/2

220-240/115 V White


EAN 8024530012588



# MX 3250/2

## AMPLIFIED MASTER UNIT

Line Art 2D

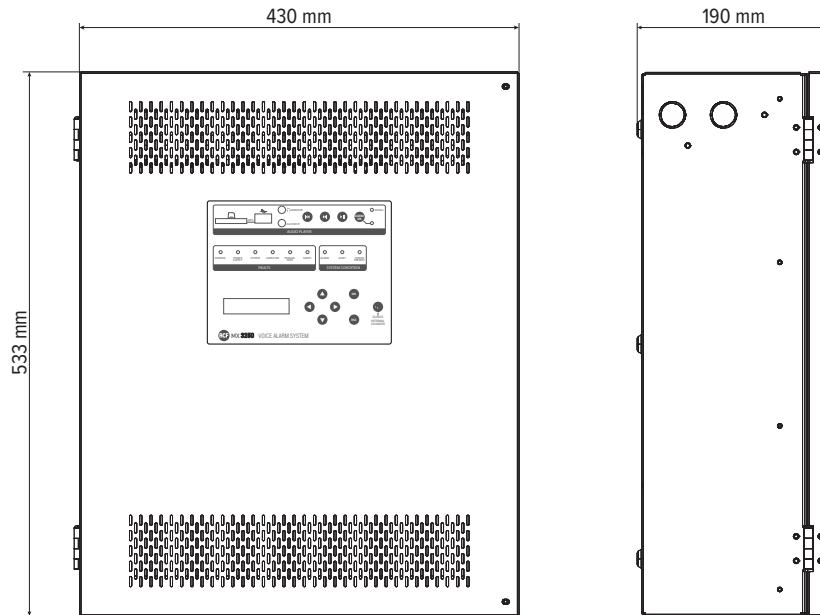

### TECHNICAL SPECIFICATIONS

#### System specifications

Number of zones managed	2
Built-in power amplifier	Yes
Spare amplifier automatic change-over	Yes
Max number of consoles	4
Number of console buses	1
Number of simultaneous emergency audio channels	1
Max number of units connectable	8
Communication bus	Serial
Connection Cables	J-Type fire-rated
Integrated pre-recorded emergency messages	Yes

#### Amplifier specifications

Amplifier Class	D+
Number of channels	2
Power output (@ 100 V)	250 W RMS
A/B speakers line	Yes
Frequency Response (-3dB)	80 Hz - 16 kHz
Signal/noise rate ("A" weighted)	>98 dB
Distortion (THD+N) @ 1 kHz nominal power	<0.3 %



# MX 3250/2

## AMPLIFIED MASTER UNIT

<b>Input section</b>	Total number of inputs	3
	Balanced	3
	Mono	3
	Line inputs	2
	Line connectors	Euroblock, JACK
	VOX	Yes
	Paging inputs	1
	Paging connectors	Euroblock
	Paging command	Serial
	Paging emergency	Yes
	General Purpose Inputs (GPI)	6
	Monitored GPI	6
	Photo-coupled GPI	6
<b>Output section</b>	Signal output number	1
	Signal output connectors	JACK
	Power output lines	2
	Power output connectors	Euroblock
	General Purpose Outputs (GPO)	6
<b>Processing</b>	DSP	Yes
	Tone controls	Yes
	High-pass filter	20 Hz - 500 Hz
<b>Controls</b>	Configuration	DIP switch, Front panel
	Chime tone	Yes
<b>Protections</b>	Cooling	Convection
	Short circuit	Yes
	Thermal	Yes
	DC	Yes
	Fuses	Yes
	VHF (Very High Frequencies)	Yes
<b>Audio sources</b>	USB pen drives	Yes
	SD card	Yes
<b>Power requirement</b>	Operating voltage	220-240/115 V~ 50/60Hz
	Voltage selection	Internal
	DC power	Yes
	DC power value	24 V
	Power consumption	400 W
<b>Standard compliance</b>	IP protection grade	IP 30
	Safety agency	CE compliant
	EN54-16 certified	Yes
	EN54-4 certified	Yes
	CPR number	0068-CPR-007/2015



# MX 3250/2

## AMPLIFIED MASTER UNIT

### Physical specifications

Cabinet/Case Material	Metal
Color	White
Rack mounting	19", 12U
<b>Size / Weight</b>	
Height	533 mm / 20.98 inches
Width	430 mm / 16.93 inches
Depth	190 mm / 7.48 inches
Weight	15 kg / 33.07 lbs

### ACCESSORIES

14380036	BE 3806		EAN 8024530012120
14322013	BM 3022	Grey	EAN 8024530007034
14380028	BM 3804		EAN 8024530012137
14380037	BM 3804FM	Red - RAL 3000	EAN 8024530012885
14322030	ME 3801	White	EAN 8024530015732

### Electronics

#### BATTERIES

13360317	BATT 18AH 2X	Black	EAN 8024530015923
----------	--------------	-------	-------------------

#### BOARDS

12399049	IT 3010	Black	EAN 8024530016388
13360344	MG 3006		EAN 8024530013356

#### END OF LINES

17170176	EOL 3-9		EAN 8024530011864
----------	---------	--	-------------------

### Cables

#### CABLES

12399047	CJ 428CAT		EAN 8024530016449
----------	-----------	--	-------------------