



X 40

TWO-WAY PROFESSIONAL SPEAKER



Description X 40 is a two-way speaker designed for fixed indoor and outdoor installations requiring high audio quality and extreme durability. Thanks to the two 10" woofers and the 4" titanium-dome compression driver on a TRW asymmetric waveguide, it offers a powerful and clear sound with uniform 110° x 60° coverage. The cabinet is made of high-density polyurethane, while the aluminum grille guarantees protection from dust and rain, thanks to a waterproof fabric layer. Vertical mounting bracket included; ceiling-mount bracket available as an accessory. EN 54-24:2008 technical data available in the user manual.

- Features**
- › 1200 W RMS power handling
 - › 142 dB max SPL
 - › 50 ÷ 20000 Hz frequency range
 - › 110° x 60° asymmetric horn
 - › 2 x 10" neo woofer, 3.0" v.c.
 - › 4.0" v.c. Titanium Neo compression driver
 - › Polyurethane cabinet / aluminum grille
 - › IP55 protection grade
 - › 4 pole barrier strip terminals
 - › Wall mount vertical bracket included


Part Number	13100121 X 40	Black - RAL 9005 EAN 8024530024277
	13100129 X 40 W	White - RAL 9003 EAN 8024530025489



X 40

TWO-WAY PROFESSIONAL SPEAKER

Line Art 2D

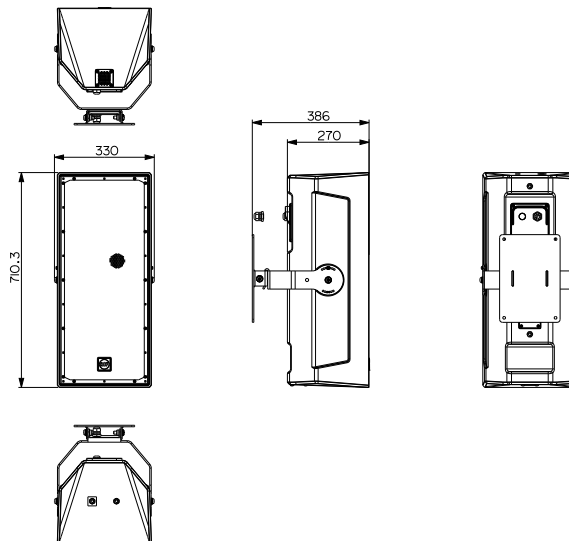

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	50 Hz - 20000 Hz
	Max SPL @ 1m	142 dB
	Horizontal coverage angle	110°
	Vertical coverage angle	60°
Power section	Amplification	Full Range
	Nominal Impedance	8 ohm
	Power Handling	1200 W RMS
	Peak Power Handling	4800 W PEAK
	Protections	Dynamic active mosfet
Transducers	Crossover Frequencies	750 Hz
	Compression Driver	1 x 1.4" neo, 4.0" v.c
	Woofer	2 x 10" neo, 3.0" v.c
Input/Output section	Input connectors	Screw Terminals
	Output connectors	Screw Terminals
Standard compliance	IP protection grade	IP 55
	Safety agency	CE compliant
	EN54-24 certified	Yes
	CPR number	0068-CPR-254/2026
Physical specifications	Cabinet/Case Material	Structural Polyurethane
	Hardware	Wall mount vertical bracket included 2 x M10 (top) - 2 x M10 (back)
	Grille	Aluminum with water-repellent protection
	Color	Black - RAL 9005, White - RAL 9003



X 40

TWO-WAY PROFESSIONAL SPEAKER

Size / Weight

Height	710 mm / 27.95 inches
Width	311 mm / 12.24 inches
Depth	270 mm / 10.63 inches
Weight	25 kg / 55.12 lbs

Rigging / Mounting

ACCESSORIES

VERTICAL BRACKETS

13360749	VBR60749	Black - RAL 9005	EAN 8024530025076
13360792	VBR60792	White - RAL 9003	EAN 8024530025403